




## 活塞式真空幫浦



No. 10W



VP0125/VP0140


No. 40W



VP0435A

型 式	VP0125	VP0140	VP0435A
達到真空度	(-250mmHg) -33.3kPa (-333mbar) (-9.84in.Hg)	(-400mmHg) -53.3kPa (-533mbar) (-15.7in.Hg)	(-350mmHg) -46.7kPa (-467mbar) (-13.78in.Hg)
開放時流量	7 l/min(0.247cfm)	3 l/min(0.106cfm)	25 l/min(0.88cfm)
消費電力	15W	15W	39W
毛 重	0.7kg(1.54Lbs.)	0.7kg(1.54Lbs.)	2.3kg(5.1Lbs.)
尺 寸	75(W)×101(L)×90(H)mm	75(W)×101(L)×90(H)mm	106(W)×161(L)×122(H)mm

No. 60W



VP0625

No. 70W



VP0660

型 式	VP0450	VP0625	VP0660
達到真空度	(-500mmHg) -66.7kPa (-667mbar) (-19.7in.Hg)	(-250mmHg) -33.3kPa (-333mbar) (-9.84in.Hg)	(-600mmHg) -80kPa (-800mbar) (-23.6in.Hg)
開放時流量	18 l/min(0.64cfm)	40 l/min(1.41cfm)	25 l/min(0.88cfm)
消費電力	34W	60W	70W
毛 重	2.2kg(4.8Lbs.)	3kg(6.6Lbs.)	5kg(11Lbs.)
尺 寸	88(W)×85(L)mm	118(W)×175(L)×138(H)mm	150(W)×206(L)×154(H)mm

No. 90W



VP0940

No. 120W



VP0660X2

型 式	VP0940	VP0660×2	
		Series Connection	Parallel Connection
達到真空度	(-400mmHg) -53.3kPa (-533mbar) (-15.7in.Hg)	(-700mmHg) -93.3kPa (-933mbar) (-27.5in.Hg)	(-600mmHg) -80kPa (-800mbar) (-23.6in.Hg)
開放時流量	60 l/min(2.12cfm)	25 l/min(0.88cfm)	50 l/min(1.76cfm)
消費電力	95W	125W	
毛 重	4.55kg(10Lbs.)	10kg(22Lbs.)	
尺 寸	150(W)×193(L)×154(H)mm	150(W)×396(L)×154(H)mm	



## 活塞式鼓風機




No. 30W/50W



LA-28B/LA-45B

No. 60W/80W

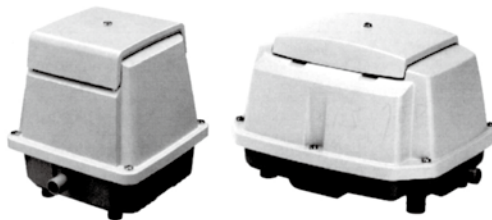

LA-60B/LA-80B

No. 100W/130W




LA-100/LA-120

型 式	LA-28B	LA-45B	LA-60B	LA-80B	LA-100A	LA-120A
達到真空度	0.011MPa (0.11kgf/cm <sup>2</sup> ) (0.11bar) (1.56psig)	0.015MPa (0.15kgf/cm <sup>2</sup> ) (0.15bar) (2.13psig)	0.018MPa (0.18kgf/cm <sup>2</sup> ) (0.18bar) (2.56psig)	0.018MPa (0.18kgf/cm <sup>2</sup> ) (0.18bar) (2.56psig)	0.018MPa (0.18kgf/cm <sup>2</sup> ) (0.18bar) (2.56psig)	0.018MPa (0.18kgf/cm <sup>2</sup> ) (0.18bar) (2.56psig)
開放時流量	28 l/min(0.99cfm)	45 l/min(1.59cfm)	60 l/min(2.12cfm)	80 l/min(2.83cfm)	100 l/min(3.53cfm)	120 l/min(4.24cfm)
消費電力	34W	29W	64W	86W	100W	130W
毛 重	2.8kg(6.2Lbs.)	3.0kg(6.6Lbs.)	5.3kg(11.7Lbs.)	5.3kg(11.7Lbs.)	9.4kg(20.7Lbs.)	9.4kg(20.7Lbs.)
尺 寸	182(W)×207(L)×205(H)mm		214(W)×305(L)×188(H)mm		210(W)×408(L)×232(H)mm	



# 小型真空幫浦

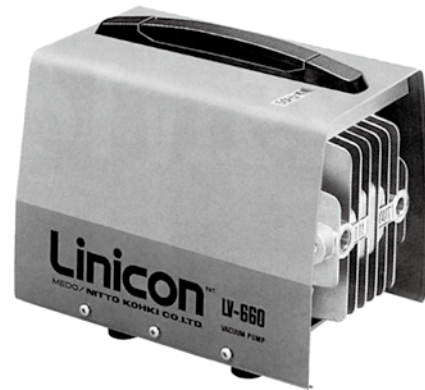

型 式	LV-125A	LV-140	LV-660
到達真空度	-33.3kPa(-250mmHg)	-53.3kPa(-400mmHg)	-80kPa(-600mmHg)
吐出空気量	5 l/min	2.51 l/min	2.5 l/min
定格電圧	AC100V		AC100V
消費電力	15/14W		60W(70)
電 流	0.35/0.3A	0.35/0.3A	2.0A(2.2A)
定格時間	連続	60分	連続
耐用時間	3,000時間		6,000時間
吸入口	マイクロカプラソケット		PT1/4
吐出口	マイクロカプラソケット		PT1/4
定格周波数	50/60Hz 兼用		50Hz 専用 (60Hz 専用)
コイロ絶縁階級	E 種相当		B 種相当
本体寸法 (mm)	145(W)×84(L)×134(H)mm		241(W)×177(L)×204(H)mm
本体質量	1.2kg		6.3kg
電 源コード	2.5m( プラダ付キャブタイヤコ ド )		1.5m( プラダ付キャブタイヤコード )
電 源スイッチ	トグルスイッチ		トグルスイッチ