




No. SH




No. SM



No. SM




No. SHL




電腦編號	規格型式	LS	ΦD	A	ΦT	ΦBs	Hs	C	E
112090500	MC-04SH	27.5	9.5	8	4.8	2.5	—	—	—
112090650	MC-05SM	24	9.5	4.5	M5X0.8	2.5	六角 9	—	—
112090750	MC-10SM	30	9.5	9	PT1/8	2.5	六角 11	—	—
112090550	MC-04SHL	29.5	9.5	8	4.8	2.5	六角 9	24.5	18
112090510	MC-04SHB	35	9.5	8	4.8	2.5	六角 11	15	—


No. PH




No. PM






No. PM



No. PHL



電腦編號	規格型式	LS	C	A	ΦHP	ΦT	ΦBp	E
112090100	MC-04PH	19	9.2	8	5.5	4.8	2.5	—
112090600	MC-05PM	17	9.2	4.5	六角 7	M5X0.8	2.5	—
112090700	MC-10PM	26	12.5	9	六角 11	PT1/8	2.5	—
112090150	MC-04PHL	22.5	17.5	8	六角 7	4.8	2.5	18

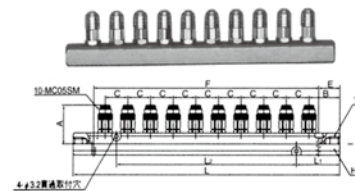

電腦編號	規格型式	L	L ₁	L ₂	A	B	C	E	E	F	T	H
112090000	MC-03	78	31	16	27.5	23	16	15	15	48	2-PT1/8	四角 16
112090900	MC-05	110	31	48	27.5	23	16	15	15	80	2-PT1/8	四角 16
112091000	MC-10	190	31	128	27.5	23	16	15	15	160	2-PT1/8	四角 16

耐 壓 力：最高壓力 15 kg/cm²
 使用溫度範圍：-5°C ~ +80°C
 用 途：氣壓缸、電磁閥弁等各種配管。
 材 質：銅