



# 氣動衝擊扳手

## AIR IMPACT WRENCHES

(單錘衝擊型 VHAMB12.)

# VESSEL®

普通螺栓直徑 **6~8 mm**

No. **GT-S650**

9.5



No. **GT-S600C**

9.5



No. **GT-P6II**

9.5



普通螺栓直徑 **12.7 mm**

No. **GT-P8II**



普通螺栓直徑 **14 mm**

No. **GT-P12**

12.7



No. **GT-1400P**

12.7



普通螺栓直徑 **14 mm**

No. **GT-C1400**

12.7



普通螺栓直徑 **16 mm**

No. **GT-P14J**

12.7



No. **GT-P14JL**

12.7



No. **GT-1600P**

12.7



No. **GT-1600PL**

12.7



| 規格<br>型式  | 普通螺絲<br>mm | 實用扭力<br>範圍<br>(參考)<br>(N·m) | 無負荷<br>回轉數<br>(r.p.m) | 空氣<br>消費量<br>(m <sup>3</sup> /min) | 管接頭   | 使用空氣<br>軟管內徑<br>(mm) | 全長<br>(mm) | 重量<br>(kg) |
|-----------|------------|-----------------------------|-----------------------|------------------------------------|-------|----------------------|------------|------------|
| GT-S650   | 6~8        | 49~121.6                    | 7,500                 | 0.35                               | Rc1/4 | 6.35                 | 210        | 1.3        |
| GT-P6 II  | 6~8        | 49~121.6                    | 8,500<br>(Z)7,500     | 0.38                               | Rc1/4 | 6.35                 | 146        | 1.43       |
| GT-S600C  | 6~8        | 25~47                       | 7,300                 | 0.35                               | Rc1/4 | 6.35                 | 255        | 1.87       |
| GT-P8 II  | 8~10       | 49~259.8                    | 7,500<br>(Z)7,200     | 0.4                                | Rc1/4 | 6.35                 | 166        | 1.89       |
| GT-P12    | 12~14      | 49~294.1                    | 7,500<br>(Z)7,300     | 0.4                                | Rc1/4 | 6.35                 | 185        | 2.3        |
| GT-1400P  | 12~14      | 49~294.1                    | 7,000                 | 0.35                               | Rc1/4 | 12.7                 | 182        | 2.25       |
| GT-C1400  | 14         | 49~220                      | 4,500                 | 0.3                                | Rc1/4 | 12.7                 | 277        | 2.8        |
| GT-P14J   | 14~16      | 75~323.6                    | 6,500<br>(Z)6,300     | 0.42                               | Rc1/4 | 12.7                 | 197        | 2.95       |
| GT-P14JL  | 14~16      | 75~323.6                    | 6,500                 | 0.42                               | Rc1/4 | 12.7                 | 226        | 3.0        |
| GT-1600P  | 14~16      | 490~308.9                   | 6,700                 | 0.36                               | Rc1/4 | 12.7                 | 196        | 2.7        |
| GT-1600PL | 14~16      | 490~308.9                   | 6,700                 | 0.36                               | Rc1/4 | 12.7                 | 224        | 2.8        |

Installation bit size **20 mm**

No. **GT-P18J**

19




No. **GT-2000P**

19




No. **GT-P18JL**

19

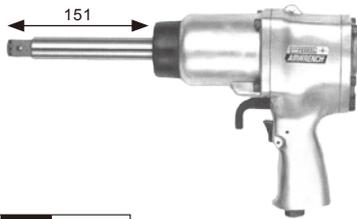

No. **GT-2000PL**


19



Installation bit size **42 mm**


No. **GT-4200P**

25.4



No. **GT-4200L**

25.4

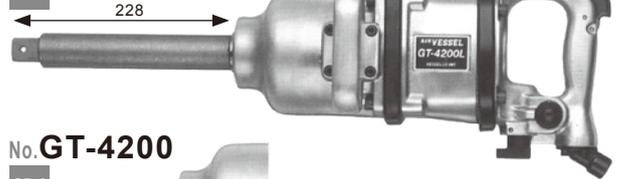

No. **GT-4200**

25.4




| 電腦編號      | 規格<br>型式  | 普通螺絲<br>mm | 實用扭力<br>範圍<br>(參考)<br>(N·m) | 無負荷<br>回轉數<br>(r.p.m) | 空氣<br>消費量<br>(m <sup>3</sup> /min) | 使用空氣<br>軟管內徑<br>(mm) | 管接頭   | 全長<br>(mm) | 重量<br>(kg) |
|-----------|-----------|------------|-----------------------------|-----------------------|------------------------------------|----------------------|-------|------------|------------|
|           |           |            |                             |                       |                                    |                      |       |            |            |
| 100118100 | GT-P18J   | 16~20      | 98~470.7                    | 5,000                 | 0.52                               | 9.5                  | Rc1/4 | 240        | 4.2        |
|           | GT-P18JL  | 16~20      | 98~441.3                    | 5,000                 | 0.52                               | 9.5                  | Rc1/4 | 353        | 4.7        |
| 110118300 | GT-2000P  | 16~20      | 98~470.7                    | 5,000                 | 0.45                               | 9.5                  | Rc1/4 | 241        | 4.3        |
|           | GT-2000PL | 16~20      | 98~441.3                    | 5,000                 | 0.45                               | 9.5                  | Rc1/4 | 354        | 4.7        |
| 100124500 | GT-4200P  | 27~42      | 490~1863                    | 2,500                 | 1.0                                | 12.7                 | Rc3/8 | 315        | 14.2       |
|           | GT-4200L  | 27~42      | 490~1863                    | 3,200                 | 1.0                                | 12.7                 | Rc1/2 | 593        | 15.9       |
|           | GT-4200   | 27~42      | 490~1863                    | 3,200                 | 1.0                                | 12.7                 | Rc1/2 | 403        | 14.9       |

Installation bit size **10 mm**


No. **GT-R10M**

9.5



No. **GT-R10**

9.5

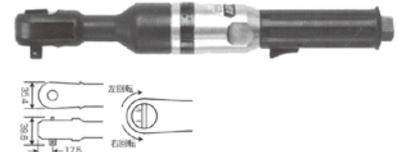

| 電腦編號      | 規格<br>型式 | 普通螺絲<br>mm | 無負荷<br>回轉數<br>(r.p.m) | 空氣<br>消費量<br>(m <sup>3</sup> /min) | 使用空氣<br>軟管內徑<br>(mm) | 管接頭   | 全長<br>(mm) | 重量<br>(g) |
|-----------|----------|------------|-----------------------|------------------------------------|----------------------|-------|------------|-----------|
|           |          |            |                       |                                    |                      |       |            |           |
| 100199110 | GT-R10M  | 10         | 250                   | 0.3                                | 6.35                 | Rc1/4 | 170        | 500       |
| 100199100 | GT-R10   | 10         | 160                   | 0.4                                | 6.35                 | Rc1/4 | 297        | 1,090     |