

Installation bit size **5~6 mm**

No. **GT-P60XW**

9.5



Installation bit size **6~8 mm**

No. **GT-S60CW**

9.5



No. **GT-S60XW**

9.5



Installation bit size **8~10 mm**

No. **GT-P80W**

12.7



Installation bit size **6~8 mm**

No. **GT-S65W**


9.5



Installation bit size **20 mm**

No. **GT-S20RW**

19



No. **GT-S70WK**

9.5



No. **GT-P65W**

9.5




電腦編號	規格		實用扭力 範圍 (參考) (N·m)	無負荷 回轉數 (r.p.m)	空氣 消費量 (m ³ /min)	管接頭	使用空氣 軟管內徑 (mm)	全長 (mm)	重量 (kg)
	普通螺絲 mm	型式							
	6~8	GT-P60XW	49~116.8	7,500	0.38	Rc1/4	6.35	169.4	1.1
	6~8	GT-S60XW	49~116.8	7,500	0.38	Rc1/4	6.35	192	1.0
100112600	6~8	GT-P65W	49~121.6	8,500	0.38	Rc1/4	6.35	146	1.43
100112550	6~8	GT-S65W	49~121.6	7,500	0.35	Rc1/4	6.35	210	1.3
100112570	6~8	GT-S70WK	85~176.5	7,500	0.39	Rc1/4	6.35	231	1.3
100112500	6~8	GT-S60CW	25~47	7,300	0.35	Rc1/4	6.35	255	1.87
100114200	8~10	GT-P80W	49~259.8	7,500	0.4	Rc1/4	6.35	164	1.89
100117300	12~16	GT-P14W	49~421.6	6,400	0.47	Rc1/4	9.5	200	3.2
10019100	20	GT-S20RW	75~610	4,800	0.9	Rc3/8	9.5	300	5.4

Installation bit size **22 mm**

No. **GT-S220W**


19




Installation bit size **33 mm**

No. **GT-S32RW**

25.4

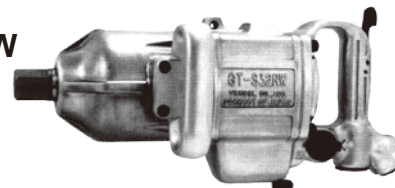


電腦編號	規格		普通螺絲  mm	實用扭力範圍 (參考) (N.m)	無負荷回轉數 (r.p.m)	空氣消費量 (m ³ /min)	使用空氣軟管內徑 (mm)	管接頭	全長 (mm)	重量 (kg)
	型式									
100119150	GT-S220W		22	147~843.4	4,400	0.7	9.5	Rc3/8	334	6.85
	GT-S32RW		33	343~1,569	3,600	1.0	12.7	Rc1/2	380	12.2

Installation bit size **6~8 mm**

No. **GT-P6T**


9.5

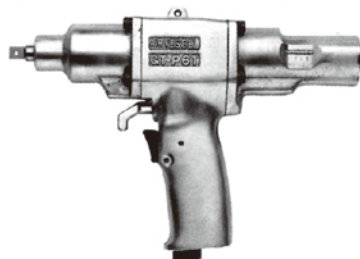


Installation bit size **8~10 mm**


No. **GT-P8T**

12.7

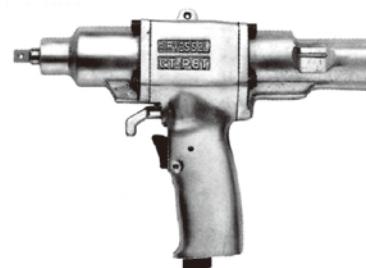

電腦編號	規格		普通螺絲  mm	實用扭力範圍 (參考) (N.m)	無負荷回轉數 (r.p.m)	空氣消費量 (m ³ /min)	使用空氣軟管內徑 (mm)	管接頭	全長 (mm)	重量 (kg)
	型式									
100100100	GT-P6T		6~8	7.8~17.6	3,000	0.27	6.35	Rc1/4	246	1.5
100100200	GT-P8T		8~10	17.6~31.4	2,500	0.31	6.35	Rc1/4	266	2.2

No. **GT-C1400 (狹小空間用)**

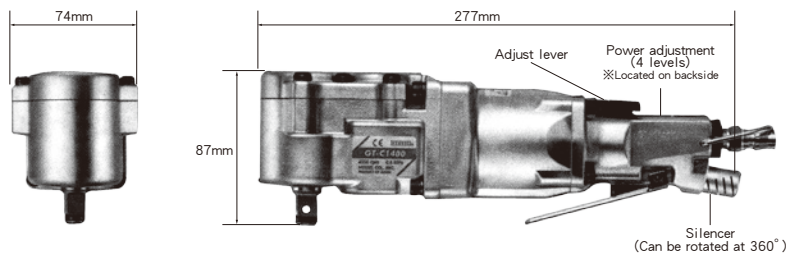

規格		標準螺絲  mm	無負荷回轉數 (r.p.m)	空氣消費量 (m ³ /min)	全長 (mm)	重量 (kg)
型式						
GT-C1400		14	4,500	0.3	277	2.8