




氣動剪




No. GT-NR3/5/7/10L/20/30/50

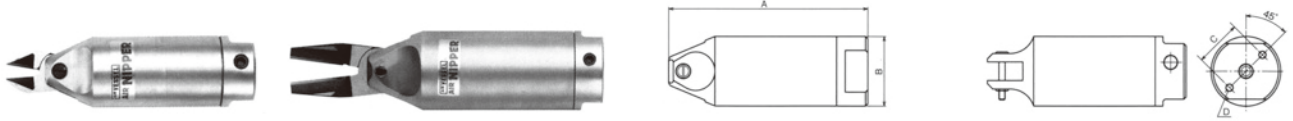


電腦編號	規格 型式	能力 (下行為適用刀刃型號)					加壓力 (kgf)	空氣 消費量 (m ³ /min)	全長 (mm)	直徑 (mm)	重量 (g)	使用 空氣 壓力 (kgf/cm ²)
		銅線	鐵線	鋼琴線	樹脂	硬質樹脂						
100207200	GT-NR3	1.0	0.5	0.2	0.2		30	45	110	23	70	4~5
		N3AS • N3HS		N3HS	N3AP • N3AE							
100207210	GT-NR5	1.0	0.5	0.3	2.0		40	64	94	30	100	4~5
		N5AS • N5HS		N5HS	N5AP • N5AE							
100207310	GT-NR7	1.6	1.0	0.5	3.0	2.0	50	116	113	34	130	4~5
		N7AS • N7HS		N7HS	N7AP • N7PF • N7AE							
100207420	GT-NR10L	1.8	1.2		4.0	2.6	60	116	113	36	160	4~6
		N10LAS			N10LAP • N10LPF							
100207510	GT-NR20	2.6	2.0	1.0	7.0(6.0)	5.0(4.0)	140	230	129	45	280	5~6
		N20AS • N20HS • N20AG		N20HS	N20AP • N20PF • N20AE(N20AJL)							
100207530	GT-NR30	3.3	2.8	1.2	10.0(8.0)	6.5(5.0)	280	584	165	56	510	5~6
		N30AS • N30AG		N30AG	N30AP • N30AE(N30ATL) N30PF • N30AJ							
100207540	GT-NR50	5.5	4.5	1.6	12.0	6.5	480	1,170	222	75	1,200	5~6
		N50AS • N50AG		N50AG								

No. GT-NR3/5/7/10L/20/30/50 (增壓阻)



電腦編號	型式	規格 適用 型式	能力 (下行為適用刀刃型號)					加壓力 (kgf)	空氣 消費量 (m ³ /回)	全長 (mm)	直徑 (mm)	重量 (g)
			銅線	鐵線	鋼琴線	樹脂	硬質樹脂					
100209540	P-10L	N12-NS10L-NR10L	2.6	1.6		5.0	4.0	100	223	71	36	110
			N10LAS			N3AP • N3AE						
100209560	P-20	N20-NS20-NR20	3.0	2.2	1.2	8.0	6.0	230	508	87	45	208
			N20AS • N20HS • N20AG		N20HS	N20AT • N20PF • N20AE(N20AJL)						
100209580	P-30	N30-NS30-NR30	1.6	1.0	1.2	13.0	7.0	450	956	92	56	315
			N30AS • N30AG			N30AT • N30PF • N30AE(N30AJL)						
100209600	P-50	N50-NR50	6.5	5.5	2.0			790	2,670	133	75	776
			N50AS • N50AG									

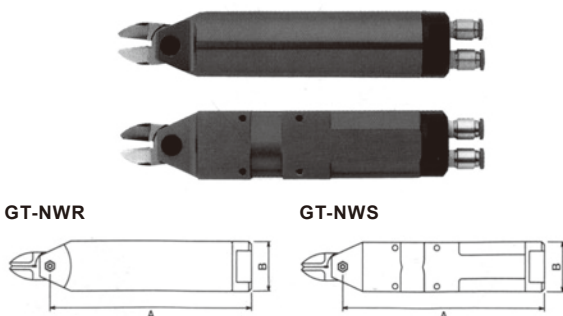


電腦編號	型號 No.	能力 (mm)		
		銅線	鐵線	硬質樹脂
	GT-NWR1	1.0	0.5	2.0
	GT-NWR10	1.8	1.2	4.0
	GT-NWR20	2.6	2.0	6.5
	GT-NWR30	3.3	2.8	9.5
	GT-NWS1	1.0	0.5	2.0
	GT-NWS10	1.8	1.2	4.0
100209000	GT-NWS20	2.6	2.0	6.5

No. GT-NB20/30/20LW/30LW

GT-NB20LM-10TM

GT-NB20


GT-NB20,NB30

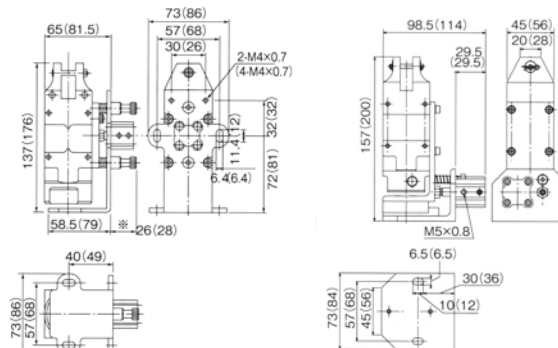

電腦編號	型號	各部寸法 (mm)		方向範圍 (mm)	重量 (g)
		A	B		
100200605	GT-NB20(5-OSHI)	59	22	押 0~5	755
100200600	GT-NB20(5-HIKU)	61.5	27	引 0~5	755
	GT-NB20(10-OSHI)	59	27	押 0~10	755
100200610	GT-NB20(10-HIKU)	66.5	29	引 0~10	755
	GT-NB30(10-HIKU)	77.5	28.5	引 0~10	1,435
	GT-NB20LW-10TM	65	28.5	引 0~10	785
100200611	GT-NB30LW-10TM		28.5	引 0~10	1,315
	GT-NB20LW-10SM		29.5	押 0~10	785
100200612	GT-NB30LW-10SM		29.5	押 0~10	1,315

刀刃


No. GT-NB20/30/20LW/30LW

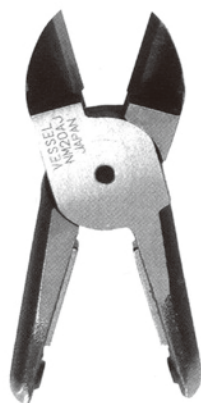

仕様


ストレート薄刃

AJタイプ




樹脂用

APタイプ



樹脂用クイキリ刃

AEタイプ



電腦編號	型號	適用機種	切断能力φ (mm)		a	b	c
			軟質樹脂	硬質樹脂			
	NM20AJ	GT-N20	7.0	5.0	35	12	
	NM20AP	GT-NS20	7.0	5.0	35	12	15
	NM20AE	GT-NR20	7.0	5.0	28	12	
	NM30AJ	GT-N30	10.0	6.5	52	17	
	NM30AP	GT-NS30	10.0	6.5	66	17	15
	NM30AE	GT-NR30	10.0	6.5	45	17	