



氣動衝擊扳手

AIR IMPACT WRENCHES

(超輕量 V 型)

VESSEL®

普通螺栓直徑 **16 mm**

No. **GT-1600VPX**

6.35



No. **GT-1600VPH**

6.35



No. **GT-1600VPHL**

6.35



No. **GT-1600VP**

6.35



No. **GT-1600VPL**


6.35



普通螺栓直徑 **39 mm**


No. **GT-3900VP**

6.35




No. **GT-3900VL**

6.35

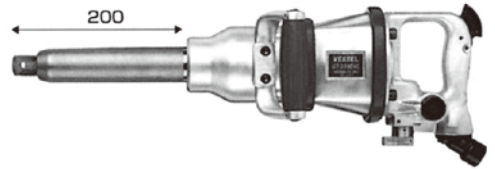

No. **GT-3900V**


6.35

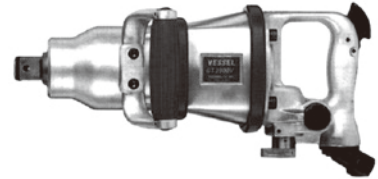

普通螺栓直徑 **48 mm**

No. **GT-4800VL**

6.35

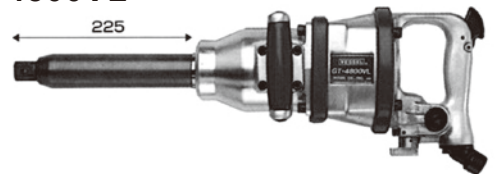

規格 型式	普通螺絲 mm	實用扭力 範圍 (參考) (N·m)	無負荷 回轉數 (r.p.m)	空氣 消費量 (m ³ /min)	管接頭	使用空氣 軟管內徑 (mm)	全長 (mm)	重量 (kg)
GT-1600VPX	16	49~294.2	8,200	0.4	Rc1/4	6.35	169	1.48
GT-1600VP	16	49~304.0	8,500	0.4	Rc1/4	6.35	171	1.91
GT-1600VPL	16	49~304.0	8,500	0.4	Rc1/4	6.35	199	1.95
GT-1600VPH	16	49~284.3	8,200	0.4	Rc3/8	6.35	174.5	1.75
GT-1600VPHL	16	49~284.3	8,200	0.4	Rc1/2	6.35	202.5	1.8
GT-3900V	39	490~1716	4,200	0.7	Rc1/2	12.7	358.6	8.2
GT-3900VP	39	490~1716	4,200	0.7	Rc3/8	12.7	268	7.95
GT-3900VL	39	490~1716	4,200	0.7	Rc1/2	12.7	524	8.95
GT-4800VL	48	343~2010	3,200	1.0	Rc1/2	12.7	559	12.8